




SPECIFICATIONS

Sealed Rechargeable Nickel Cadmium Ni-CD 300mAh AAA





MODEL No: NCAAA300

Description: 300mAh AAA SIZE Ni-Cd

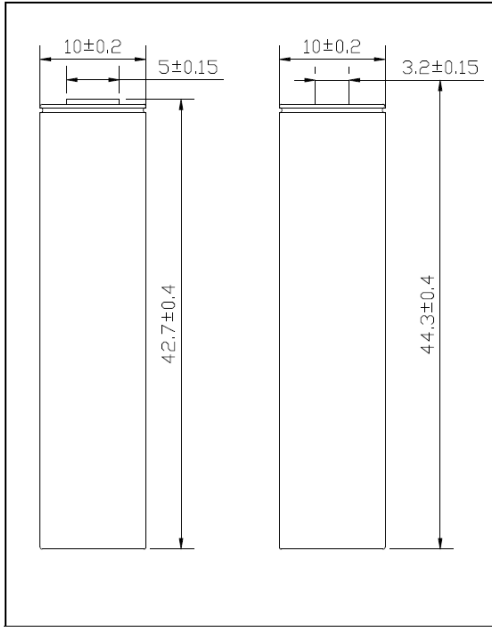

Specification

Nominal Capacity 额定容量		300 mAh	
Nominal Voltage 额定电压		1.2 V	
Charge current 充电电流	Standard 标准	30mA	
	Quick 快充	90mA	
	Fast 快充	300mA	
Charge time 充电时间	Standard 标准	14~16 Hrs	
	Quick 快充	4.3 Hrs	
	Fast 快充	1.3Hrs	
Ambient Temperature 使用温度	Charge 充电	Standard 标准	0°C~35°C
		Quick 快充	10°C~35°C
		Fast 快充	10°C~35°C
	Discharge 放电		-30°C~60°C
Storage 储存		-30°C~35°C	
Internal Impedance(mΩ) (Upon fully charge) 充满电后内阻		Max ≤45	
Weight 重量		8.5g	

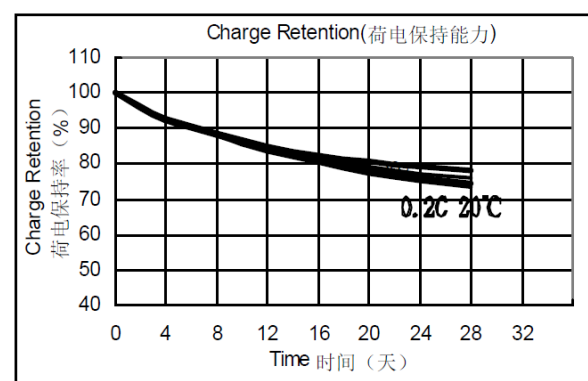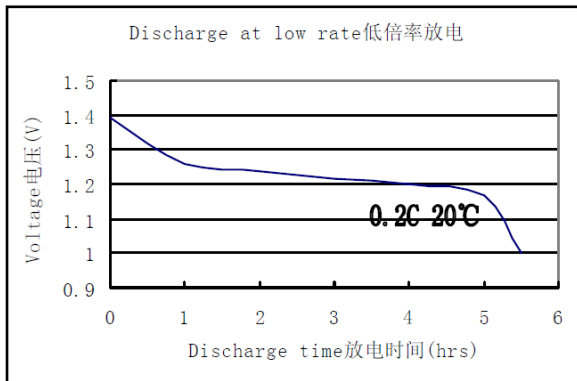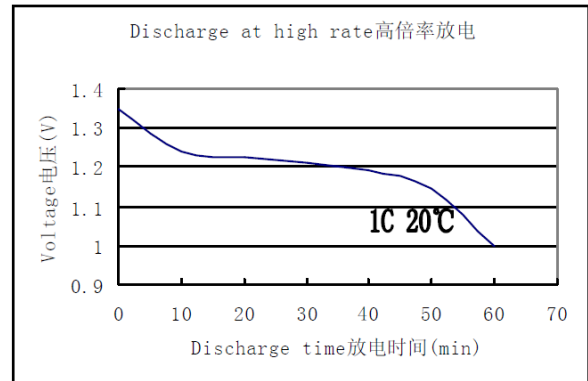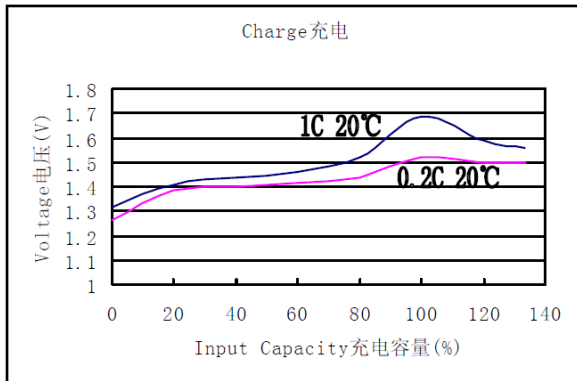



SPECIFICATIONS

Sealed Rechargeable Nickel Cadmium Ni-CD 300mAh AAA

2. PERFORMANCE

Unless otherwise stated, tests should be done within one month of delivery under the following conditions:

Ambient Temperature: T: $20 \pm 5^{\circ}\text{C}$

Relative Humidity: $65 \pm 20\%$

Test Item	Test Conditions				Requirements
(1)Standard Charge	Charge is conducted continuously for 16 hours at the constant current of 30mA(0.1C) after pre-discharge at the constant current of 60mA (0.2C) up to a cut-off voltage of 1.0V/cell				
(2)Open-circuit Voltage	Voltage between terminals of the charged battery specified in item (1) is measured after rest for 1 hour				$\geq 1.25\text{V}$
(3)Capacity (0.2C)	Capacity of the charged battery specified in item (1) is measured at 60mA (0.2C) up to a cut-off voltage of 1.0V after rest for 15 minutes. If the discharge time doesn't reach the specified value, the test may be carried out further twice, up to three times in total.				$\geq 300\text{mAh}$
(4)High rate discharge(1C)	Discharge time of the charged battery specified in item (1) is measured at 300mA (1C) up to a cut-off voltage of 1.0V after rest for 15 minutes. If the discharge time doesn't reach the specified value, the test may be carried out further twice, up to three times in total.				$\geq 54\text{minutes}$
(5)Fast charge (1C)	Charge: 300mA(1C) \times 1.3 hours (charging Cut off $= - \Delta V = 5 \sim 10\text{mV/cell}$ or Temp.Cut off= 50°C)				
(6)Trickle charge current	9.9mA(0.033C)~15 mA (0.05C)				
(7)Charge retention	Capacity of the charged battery specified in item (1) is measured at 60mA(0.2C) up to a cut-off voltage of 1.0V after rest for 28 days at 20°C .				$\geq 70\%$
(8)IEC Cycle life (IEC61951-1 (2003) 7.4.1.1)	Cycle No	Charge	Rest	Discharge	≥ 500
	1	0.1C \times 16h	None	0.25C \times 140min	
	2-48	0.25C \times 190min	None	0.25C \times 140min	
	49	0.25C \times 190min	None	0.25C to 1.0v	
	50	0.1C \times 16h	1-4h	0.2C to 1.0v	
Cycles 1 to so shall be repeated until the discharge duration on any 50 th cycle becomes less than 3h					
(9)Accelerated cycle life	Charge: 300mA(1C) \times 1.3 hours (charging Cut off $= - \Delta V = 5 \sim 10\text{mV/cell}$ or Temp.Cut off= 50°C) ;Discharge: 300mA(1C) to 1.0V/cell,end-of:70% nominal capacity				≥ 400
(10)Safety valve operation	Forced discharge is conducted for 60 minutes at a constant current of 300mA(1C) after pre-discharge at a constant current of 60mA(0.2C) up to 0V				Leakage, No explode or disrupt



SPECIFICATIONS
Sealed Rechargeable Nickel Cadmium
Ni-CD 300mAh AAA

(11) Leakage	Fully charged at 150mA(0.5C) for 2.4hour stand for 14 days	No leakage nor deformation
(12) Vibration Resistance	Charge the battery 0.1C 16hrs, then leave for 24hrs, check Battery before/after vibration, Amplitude 1.5mm Vibration 3000 CPM Any direction for 60mins.	Change of voltage should be under 0.02V/cell, Change of impedance should be under 5 milli-ohm/cell
(13) Impact Resistance	Charge the battery 0.1C 16hrs Then leave for 24hrs, check bat-before/after dropped, Height 50cm Wooden board(thickness 30mm) Direction not specified, 3 times.	Change of voltage should be under 0.02V/cell Change of impedance should be under 5 milli-ohm/cell

3. EXTERNAL APPEARANCE

The cell/battery shall be free from cracks, scars, breakage, rust, discoloration, leakage nor deformation.

4. CAUTION

- (1) Reverse charging is not acceptable.
- (2) Charge before use. The cells/batteries are delivered in an uncharged state.
- (3) Do not charge/discharge with more than our specified current.
- (4) Do not short circuit the cell/battery Permanent damage to the cell/battery may result.
- (5) Do not incinerate or mutilate the cell/battery.
- (6) Do not solder directly to the cell/battery.
- (7) The life expectancy may be reduced if the cell/battery is subjected adverse conditions like: extreme temperature, deep cycling, excessive overcharge/ over-discharge.
- (8) Store the cell/battery uncharged in a cool dry place. Always discharge batteries before bulk storage or shipment.