



## SPECIFICATIONS

### Sealed Rechargeable Nickel Metal Hydride Ni-MH 3000mAh Sub C

#### 1、SCOPE

This specification governs the performance of the following Nickel-Metal Hydride cylindrical cell and its stack-up battery.

Model : **NHSC3000**

Cell Size: **SC (22/42)** crew cut (**22.0±0.1×42.0±0.5**) mm

#### 2、DATA OF STACK UP BATTERIES

All data involve voltage and weight of stack-up batteries are equal to the value of unit cell multiplied by the number of unit cell, which consisted in the stack-up batteries.

Example : Stack-up batteries consisting three unit cells

Nominal voltage of unit cell=1.2V

Nominal voltage of stack-up batteries =1.2V×3=3.6V

#### 3、RATINGS

Description	Unit	Specification	Condition
Nominal Voltage	V/cell	1.2	Unit cell or stack-up batteries
Minimum Capacity	mAh	<b>3000</b>	Standard Charge/Discharge
Nominal Capacity	mAh	<b>3000</b>	Standard Charge/Discharge
Standard Charge	mA	<b>300</b> (0.1C)	T <sub>1</sub> =20±5℃ (See Note 1)
	hour	<b>16</b>	
Fast Charge	mA	<b>900</b> (1C)	- Δ V=0~5mV/cell , Timer Cutoff=120%nominal capacity , Temp.Cutoff=55℃, dT/dt=0.8℃/min, T <sub>1</sub> =20±5℃
	hour	<b>4</b> approx (See Note 2)	
Trickle Charge	mA	(0.03C)~(0.05C)	T <sub>1</sub> =20±5℃
Standard discharge	mA	<b>600</b> (0.2C)	T <sub>1</sub> = 20±5℃ Humidity: Max.85%
Discharge Cut-off Voltage	V/cell	1.0	
Storage Temperature	℃	-20~25	Within 1 year*
		-20~35	Within 6 months
		-20~45	Within 1 month
		-20~55	Within 1 week
Typical Weight	Gram	<b>56.0</b>	Unit cell

\*To keep the best performance for those not used for a long time, we recommend charging the cells/batteries at least 30% after discharge entirely in every 6 months.



## SPECIFICATIONS

### Sealed Rechargeable Nickel Metal Hydride Ni-MH 3000mAh Sub C

#### 4、PERFORMANCE

Unless otherwise stated, tests should be done within one month of delivery under the following conditions :

Ambient Temperature :  $20\pm 5^{\circ}\text{C}$

Relative Humidity :  $65\pm 20\%$

Notes : Standard Charge/Discharge conditions :

Charge : 300mA (0.1C) x14 hours

Discharge: 600mA (0.2C) to 1.0V/cell

Test	Unit	Specifications	Condition	Remarks
Capacity	mAh	$\geq 3000$	Standard Charge/ Discharge	Up to 3 cycles are allowed
Open Circuit Voltage (OCV)	V	$\geq 1.25$	Within 1 hour after standard charge	
Internal Impedance	m $\Omega$	$\leq 11$	Upon fully charged (1KHz)	
High Rate Discharge (1C)	min	$\geq 51$	Standard Charge, 1 hour rest before discharge by 1C to 1.0V/cell	Up to 3 cycles are allowed
Charge Retention	mAh	$\geq 1800$ (60%)	Standard Charge, Storage: 28 days Standard Discharge	$T_1=20\pm 5^{\circ}\text{C}$
IEC Cycle Life	Cycle	$\geq 500$	IEC61951-2(2003)7.4.1.1	See Note 3
Leakage		No leakage nor deformation	Fully charged at: 300 mA for 48 hrs	
Vibration Resistance		Change of voltage should be less than 0.02V/cell, Change of impedance should be less than 5 milli-ohm/cell	Charge the battery at 0.1C for 14hrs, then leave for 24hrs, check battery before/after vibration, amplitude 1.5mm, vibration 3000 CPM, any direction for 60mins.	

Nhsc3000\_spec\_16.0-1of2 P.2/4

*Notice: Unless duly signed and stamped, the information (subject to change without prior notice) contained herein this document is for reference only and should not be used as a criterion for product guarantee or warranty.*



**SPECIFICATIONS**  
**Sealed Rechargeable Nickel Metal Hydride**  
**Ni-MH 3000mAh Sub C**

Impact Resistance	Change of voltage should be less than 0.02V/cell, change of impedance should be less than 5 milli-ohm/cell	Charge the battery at 0.1C for 14hrs, then leave for 24hrs, check battery before/after dropped, height 50 cm wooden board (thickness 30mm) direction not specified, 3 times.	
-------------------	--	--	--

5 、 CONFIGURATION, DIMENSIONS AND MARKINGS

Please refer to the attached drawing.

6 、 EXTERNAL APPEARANCE

The cell/battery shall be free from cracks, scars, breakage, rust, discoloration, leakage or deformation.

7 、 WARRANTY

One year limited warranty against workmanship and material defects.

8 、 CAUTION

- (1) Reverse charging is not acceptable.
- (2) Charge before use. The cells/batteries are delivered in an uncharged state.
- (3) Do not charge/discharge with more than our specified current.
- (4) Do not short circuit the cell/battery. Permanent damage to the cells/batteries may result.
- (5) Do not incinerate or mutilate the cells/batteries.
- (6) Do not solder directly to the cells/batteries.
- (7) The expected life may be reduced if the cells/batteries are subjected to adverse conditions such as: extreme temperature, deep cycling, excessive overcharge/over-discharge.
- (8) Store the cells/batteries in a cool dry place. Always discharge batteries before packing.



EVERGREEN (C.P.) USA INC.

TEL: (650) 952-8091 FAX: (650) 952-3629 E-MAIL: sales@evergreencpusa.com

## SPECIFICATIONS

### Sealed Rechargeable Nickel Metal Hydride Ni-MH 3000mAh Sub C

Notes :

- [1] T1: Ambient Temperature.
- [2] Approximate charge time from discharged state, for reference only.
- [3] IEC61951-2(2003)7.4.1.1 Cycle Life:

Cycle No.	Charge	Rest	Discharge
1	0.1C × 16h	None	0.25C × 2h20min
2-48	0.25C × 3h10min	None	0.25C × 2h20min
49	0.25C × 3h10min	None	0.25C to 1.0V/cell
50	0.1C × 16h	1-4h	0.2C to 1.0V/cell

Cycle 1 to 50 shall be repeated until the discharge duration on any 50th cycle becomes less than 3 h.


Note: Charge and discharge graphs will be shown on separate sheet.



**SPECIFICATIONS**  
**Sealed Rechargeable Nickel Metal Hydride**  
**Ni-MH 3000mAh Sub C**





**MODEL No:** NHSC3000

**Description:** 3000 mAh SIZE NI-MH SC

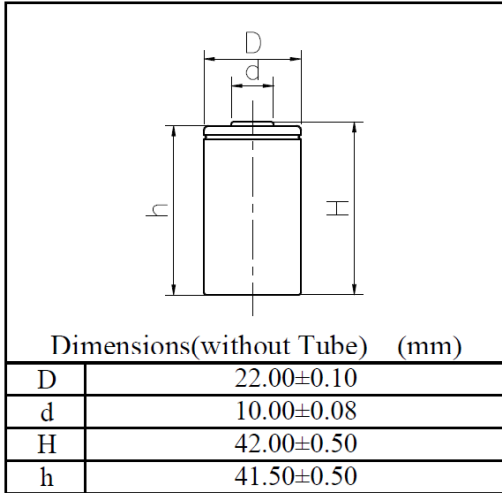

**Specification**

Nominal Capacity		3000 mAh	
Nominal Voltage		1.2 V	
Charge current	Standard	300 mA	
	Fast	900 mA	
Charge time	Standard	16 Hrs	
	Fast	4 Hrs	
Ambient Temperature	Charge	Standard	0°C~45°C
		Fast	10°C~45°C
	Discharge	-20°C~60°C	
	Storage	-20°C~55°C	
Internal Impedance(mΩ) (After Charge)		≤ 11	
Weight		56.0 g	

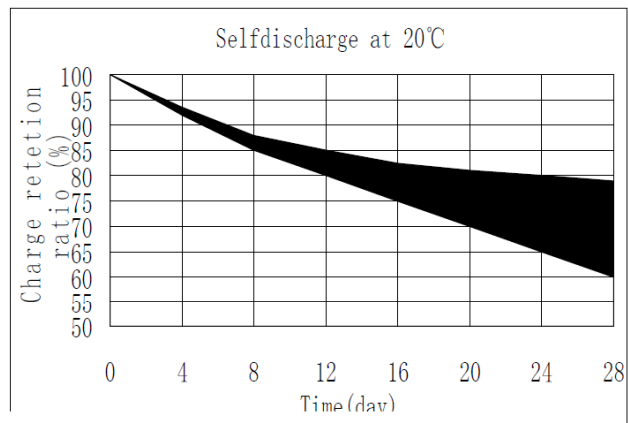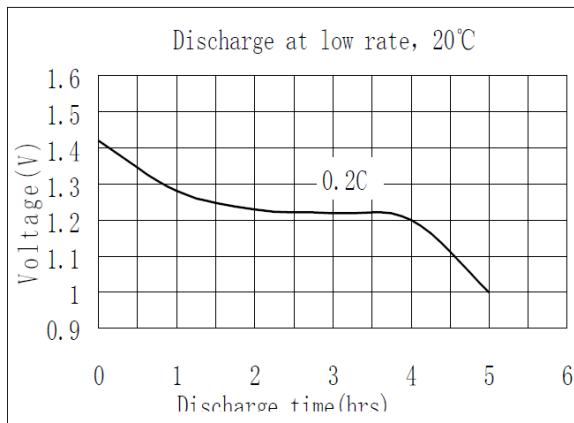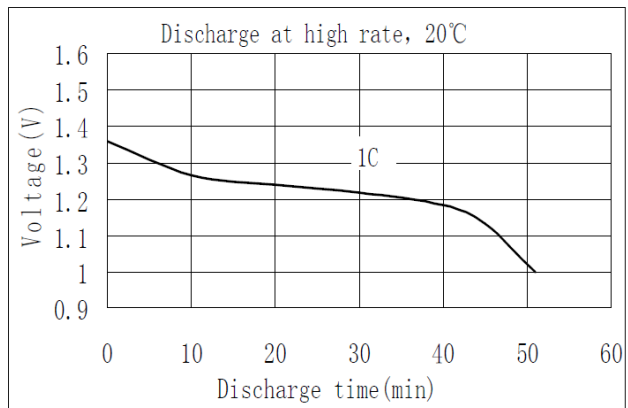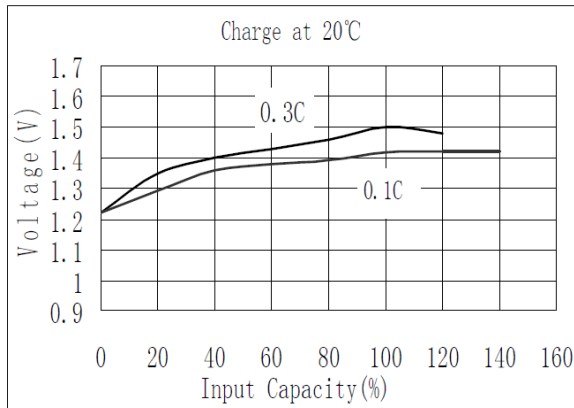

**Remark:** The manufacturer reserves the right to alter or amend the design, model and specification without prior notice.